
TECHNICAL SPECIFICATIONS	
PARAMETERS	**value**
Type	CM100
Frame Size	71M
Frequency (Hz)	50
Phase	1
KW	0.75
HP	1
Max Head (m)	32
Q (m3/h)	5
Voltage (V)	220
Current (A)	5.3
RPM	3000
Rated Speed (RPM)	2807
Torque (N.m)	2.5
P.F	0.98
Is / In	2.9
Ts / Tn	0.45
Weight (Kg)	12.2
Frame Material	Aluminum
IM	B35
IP	44
Ins.Class	B/F
Driven End-Bearing	6202-2Z
Non-Driven End-Bearing	6202-2Z
Stator Winding	Copper
Rotor Winding	Aluminum
Color	Blue-RAL5001
Pump Impeller	StainlessSteel

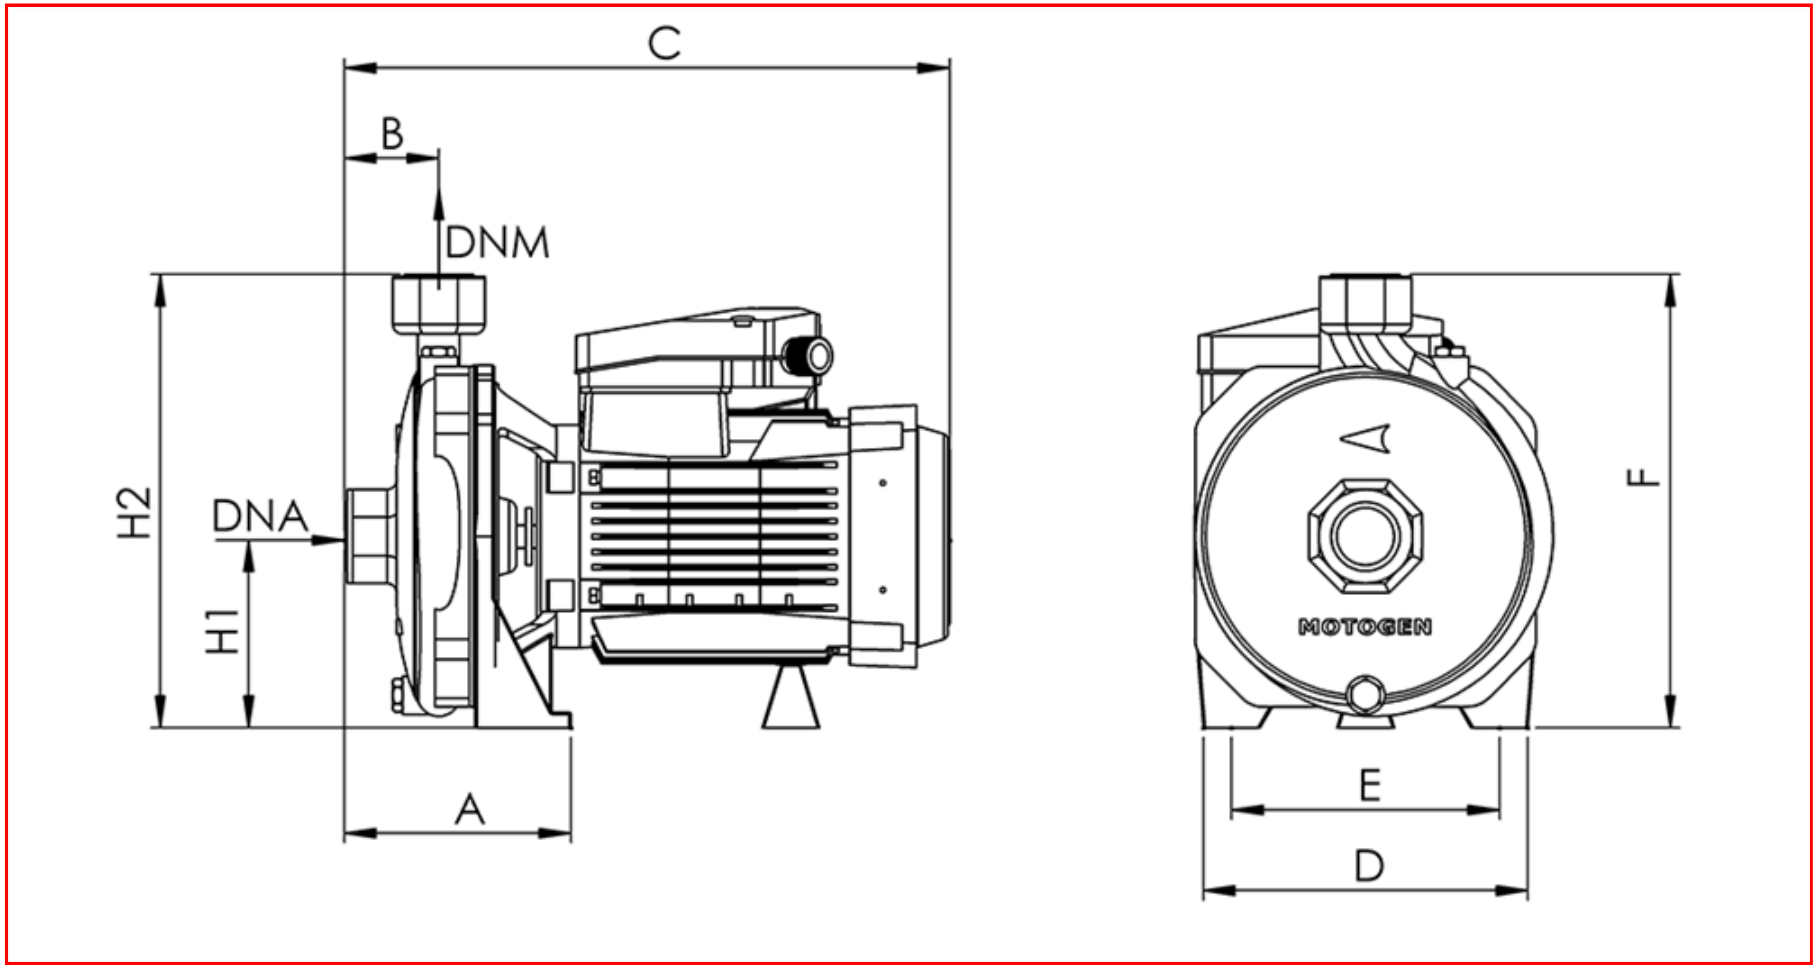

Preview

H2	H1	F	E	DNM (inch)	DNA (inch)	D	C	B	A
138	100	238	140	1"	1"	180	320	50	120