
| TECHNICAL SPECIFICATIONS | |
|---|---|
| **PARAMETERS** | **value** |
| Type | CAM100 |
| Frame Size | 71M |
| Frequency (Hz) | 50 |
| Phase | 1 |
| KW | 0.75 |
| HP | 1 |
| Q (m3/h) | 3 |
| Voltage (V) | 220 |
| Current (A) | 4.7 |
| RPM | 3000 |
| Rated Speed (RPM) | 2814 |
| Torque (N.m) | 2.5 |
| Efficiency (%) | - |
| P.F | 0.98 |
| Is / In | 2.9 |
| Ts / Tn | 0.4 |
| Frame Material | 2 |
| Weight (Kg) | 17.2 |
| Pump Impeller | Stainless |
| IM | B35 |
| IP | 44 |
| Ins.Class | F |
| Stator Winding | Copper |
| Rotor Winding | Aluminium |
| Color | Blue - RAL5001 |
| Pump Material | Cast |
| Driven End-Bearing | 6202-2Z |
| Non-Driven End-Bearing | 6202-2Z |

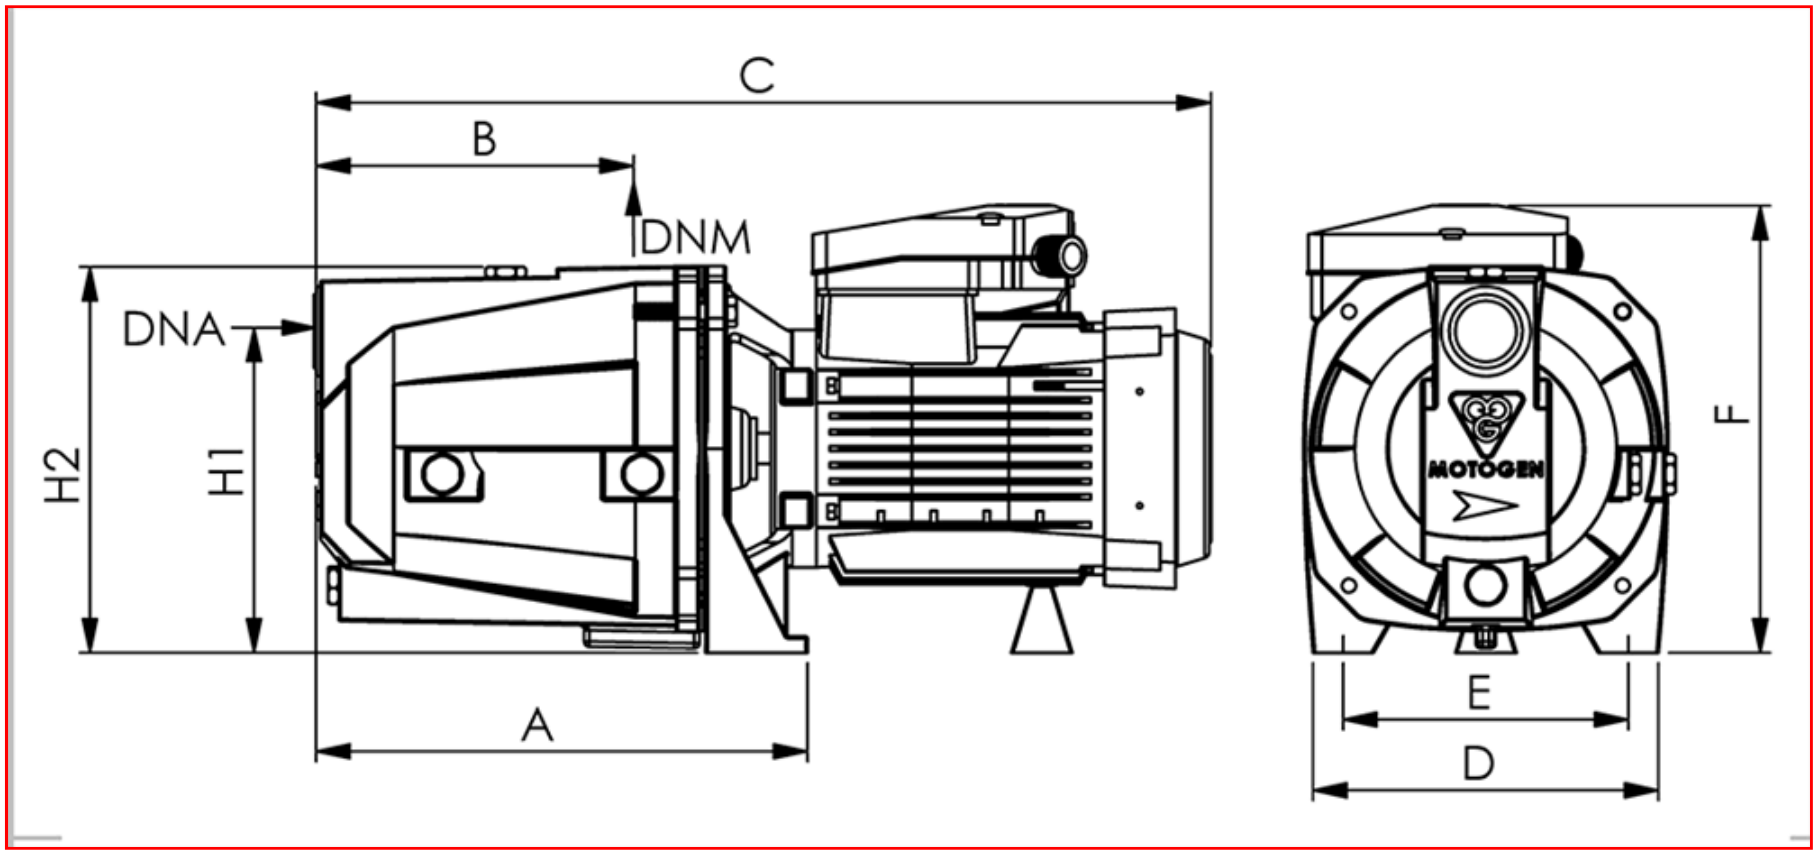


Preview

| H2 | H1 | F | E | DNM (inch) | DNA (inch) | D | C | B | A |
|---|---|---|---|---|---|---|---|---|---|
| 185 | 152 | 195 | 140 | 1" | 1" | 180 | 420 | 140 | 230 |